MEDIA CENTER by own MCRC - 303


OWI Aluminum In-ceiling Speakers Model: ICT82A










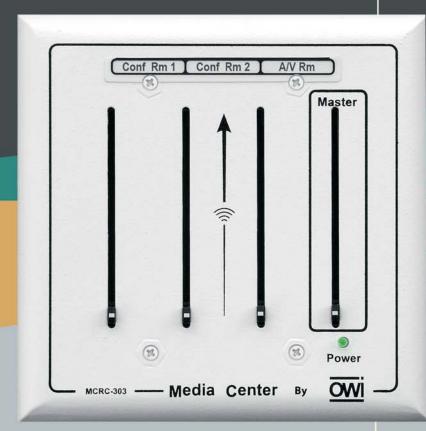

- 2 x 25 Watt Amplifier
 - 15 Volt DC Power
- Three Selectable,
 Balanced Mic or Line Inputs
 - · Projector Compatible







Microphone




CD/Computer



Media Center by OWI

WIRING DIAGRAM FOR MEDIA CENTER by OWI

- 1 Line or mic. input
- 2 Stereo combiner (Stereo to Mono) Model: AMP-STCOMB
- 3 Power supply 15V DC. Also a small power supply could be located one per every room.
- 4 Master Volume Control
- 5 Media Center Controls up to 4 speakers. If more are needed, add an AMP-IC.
- 6 Every Media Center is link by 15V DC from main or local power supply.
- 7 Every Media Center is link by two conductor speaker wire or a CAT 5 cable
- 8 One of the channels in the Media Center could be dedicated for combining.

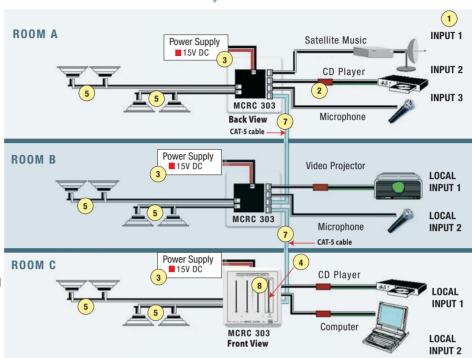

FEATURES

- Latest Digital Amp Design
- Three Selectable, Balanced Mic or Line Inputs
- 2 x 25 Watt Amplifier
- **Onboard Limiting**
- Active Balanced Line Output
- Individual Mic/Line Controls
- **Uses Latest Surface Mount Technology**
- **Short Circuit Protected**
- **Over Voltage Protected**
- **Over Heat Protected**
- UL Rated Power Supply 15V DC Power
- V-0 Fire Rated Plastic
- **Dockable Wire Connectors**
- Master Gain Control
- **Projector Compatible**
- Allows for Input Wire Runs of up to 3000 feet (CAT-5 cable)
- Allows for Line Out Wire Runs of up to 3000 feet (CAT-5 cable)
- **Double Gang Box Shallow Mounting**
- Finger Tip Sliders (Reduces chance of breakage)
- Up to 8 Speakers Maximum (4 speakers per side)
- Best use with OWI Model ICT82A In-ceiling Aluminum Speakers and other OWI Speakers
- Warranty 1 year



OWI Incorporated

17141 Kingsview Avenue Carson, CA 90746 USA ph. 310.515.1900 | 800.638.1694 fx. 310.515.1606 | e. info@owi-inc.com www.owi-inc.com

RECOMMENDED SPEAKERS | ACCESSORIES



P-Series Speakers



ICT82A





IC5/IC6







Tile Bridge

Model 6TB